

SUPERON[®]

"World Class Products"

WORLD CLASS STAINLESS STEEL WIRES





Superon Schweisstechnik India Ltd.



Corporate Office, Gurgaon

Superon Schweisstechnik India Ltd., part of the >500 crore's / USD 100 million Stanvac - Superon Group, established in the year 2004, is today India's fastest growing producer of international quality stainless steel wires & welding consumable. "Superon" is as well known in India as well as, now also in numerous other countries, all over the world, for its superior quality products (www.superonindia.com).

- ★ India's highest quality producer of stainless steel wires & welding consumables.
- ★ India's leading manufactures of stainless steel.
- ★ India's only integrated producer of "World Class" stainless steel wires, welding wires & welding electrodes.
- ★ India's best value - perfect balance of product & cost effective pricing.

Technical Collaborations With Global Leaders:



1. M/s Air Liquide Welding France / M/s Oerlikon Schweisstechnik AG, Switzerland - Licenced Manufacturing of a full range of Welding Electrodes: Mild Steel, Low Hydrogen, Stainless Steel, Hardfacing...



2. M/s Kjellberg Finsterwalde, Germany - Manufacturing of a full range of stainless steel & low heat input welding electrodes in technical collaboration.

World Class ISO Certified Manufacturing Facilities



Plant -II, Manesar Fabricated Welding Electrodes



Plant -III, Gurgaon Stainless Steel Wire



Plant -IV, Gurgaon FCAW, Wear Plates

World Class QC Equipments



Spectrometer



Computerised UTM




Mechanical Lab

GLOBAL EXPORT

- ★ Superon today produces & exports a wide range welding consumables, both electrodes & wires, welding auxiliaries, as well as stainless steel non welding wires, to over 30 countries in North & South America, Europe, Africa, Asia, Middle East.....
- ★ Excellent "Value Proposition" through Ideal balance of "World Class" quality, superior performance features & cost effective pricing.
- ★ Consistent high quality through ISO Certified production facilities, technology transfer from world leaders, & long term commitment to customer service.
- ★ Availability of a full range of welding consumables – As per AWS, Maintenance & Repair, Stainless Steel welding wires, welding auxiliaries... Single window.
- ★ Assured Reliability. Track record of quality leadership in India.



WIDE PRODUCT RANGE

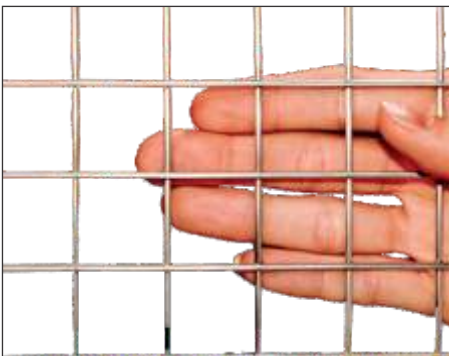

Electro Polishing Quality



Stainless Steel Fine Wire



Stainless Steel Wire/ Earthing wire



Spring Quality Wire



Cold Heading Quality Wires



Stainless Steel MIG/ TIG Wire

WIDE RANGE OF APPROVALS

International:



National:



BHARAT PETROLEUM CORP. LTD.



...And many more

WIDE RANGE OF STAINLESS STEEL WIRE

FINEWIRE



BRAIDING, KNITTING & WEAVING

Wire suitable for Braiding, knitting & weaving application mainly used in mesh manufacturing, automotive, printing and filter Industries.

GRADES :

| | | | | | | | | |
|--------------|--------|--------|----------|--------|---------|-----------|-----------|-----------|
| AISI | 302 | 304 | 304L | 305 | 309 | 309S | 310 | 310S |
| W.Nr. | 1.4310 | 1.4301 | 1.4306/7 | 1.4303 | 1.45828 | 1.4332/33 | 1.4841/42 | 1.4843/45 |

| | | | | | | | |
|--------------|--------|---------|--------|--------|--------|--------|-----------|
| AISI | 314 | 316 | 316L | 316Ti | 321 | 321H | 430 |
| W.Nr. | 1.4841 | 1.44401 | 1.4404 | 1.4571 | 1.4541 | 1.4878 | 1.4011/16 |

SIZE RANGE
0.10 mm to 0.070 mm
(0.004" to 0.028")

FINISH
Bright (heavy Oil Coated/
Slightly Oil Coated/
Without Oil Coated)

TEMPER
Soft Annealed

PACKAGING
Spools, Din -100, 125,200, 250
Ns - 5, 10

STAINLESS STEEL EPQ WIRE



Wire used for manufactured of fabricated baskets, kitchen appliances and other formed parts. these wire are widely used in the food industry, medical applications, decorative and architectural usage.

GRADES :

| | | | | |
|--------------|--------|----------|--------|--------|
| AISI | 304 | 304(L) | 316 | 316(L) |
| W.Nr. | 1.4301 | 1.4306/7 | 1.4401 | 1.4404 |

SIZE RANGE
1.40 to 3.00
3.01 & above

TOLERANCE
DIN h9

TENSILE (N/mm²)
750-900
700-850

SURFACE FINISH
mirror bright finish
cold drawn

PACKAGING
Coils

STAINLESS STEEL WIRE



GENERAL APPLICATION

Wire suitable for general purpose usage has all types of grades for different application. Wires are used for the manufacture of wire ropes, chain, pins, bolts, hooks, spoke wire etc.

GRADES

| | | | | | | | | | | | | |
|--------------|--|-----------|--------|--------|--------|--------|--------|--------|--------|-----------|-----------|-----------|
| AISI | 201 | 202 | 204.Cu | 301 | 302 | 303 | 304 | 304L | 305 | 309 | 309S | 310 |
| W.Mr. | 1.4372 <small>(3.5% - 5.5 % Ni)</small> | 1.4370/71 | 1.4597 | 1.4310 | 1.4310 | 1.4305 | 1.4301 | 1.4306 | 1.4303 | 1.4828 | 1.4832/33 | 1.4841/42 |
| AISI | 310S | 314 | 316 | 316L | 316Ti | 321 | 409ti | 410 | 420 | 430 | 431 | 434 |
| W.Mr. | 1.4843/45 | 1.4841 | 1.4401 | 1.4404 | 1.4571 | 1.4541 | 1.4512 | 0.4006 | 1.4021 | 1.4011/16 | 1.4057 | 1.4113 |

SIZE RANGE

0.70 mm to 10 mm (0.028" to 0.393")

FINISH

Soap Drawn (Matte Finish)/ Grease Drawn (Bright Finish) :- Cleaned or with residual lubricant.

PACKAGING

| | Spools (Plastic/ Metal) | Drums | Bare Coils | Carrier | Reels (metal/ wodden) | Cheese Coil (Aero Pack) | Handi Pack |
|-------------------|-------------------------------|-------|---------------|---------|-----------------------------|----------------------------|---------------|
| 00.71 to 01.20 mm | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| 01.21 to 01.80 mm | | ✓ | ✓ | ✓ | ✓ | | ✓ |
| 01.81 to 04.80 mm | | | ✓ | ✓ | ✓ | ✓ | |
| 04.81 to 04.80 mm | | | ✓ | ✓ | | ✓ | |
| 08.00 to 10.00 mm | | | ✓ | ✓ | | | |

- ★ Spools (Plastic/ Metal)
- ★ Drums
- ★ Bare Coils
- ★ Carrier
- ★ Metal/ Wooden Reels
- ★ Cheese Coils(Acro Pack)
- ★ Handi Pack



(I) Equivalent DIN/ AFNOR/ B.S/ JIS/ GOST/ UNI are supplied.
 (II) Customized chemistries are available to best suit your application.

STAINLESS STEEL SPRING WIRE



SPRINGWIRES/ WIRE FOR SHOT PENNING/ SS BALLS

Superon steel spring wire is manufactured with excellent mechanical properties for uniformity in spring forming. Our spring wire is processed under quality control with close adherence to the cast, wrap, helix and bend test of the wire and suitable surface finish. This type of wire is painstakingly finished to eliminate flaws which reduce fatigue strength i.e. lateral and longitudinal cracks, pits and marks.

GRADES :

| | | | |
|-------------|--------|--------|--------|
| AISI | 302 | 304 | 316 |
| W.Nr | 1.4310 | 1.4301 | 1.4401 |

SIZE RANGE

0.20 to 0.70 mm (0.008" to 0.028")
0.70 to 6.00 mm (0.028" to 0.236")

FINISH

Bright
Matte - soap Coated

PACKAGING

On Spools
In Coils

SPECIAL FEATURES:

- ★ Smooth Surface
- ★ High Corrosion Resistance
- ★ Excellent Heat Resistance
- ★ Superior Coiling Efficiency
- ★ High Fatigue Strength



Springs wire are produced as per

ASTM A313/ JIS G4314/ BS EN 10270

DIN 17440

ISO 4454



STAINLESS STEEL CHQ WIRE



COLD HEADING QUALITY WIRE

Superon steel CHQ wire is suitable for application such as bolts, nuts, screws, nails etc. Superon steel's wire for CHQ is made by choosing selected quality wire rods and special heat treatment process.

GRADES :

| AISI | 304 | 304L | 316 | 316L | 430 | 434 | 410 |
|------|--------|-----------|--------|--------|-----------|--------|--------|
| W.Nr | 1.4301 | 1.4306/ 7 | 1.4401 | 1.4404 | 1.4011/16 | 1.4113 | 0.4006 |

SIZE RANGE

0.80 To 2.0 mm
2.01 & above

TOLERANCE

DIN h9
DIN h9

FINISH

Uniform Coated Surface

PACKAGING

Coils, Pattern Laid Coils
Pay Pack Drums

STAINLESS STEEL WELDING WIRES

STAINLESS STEEL TIG WIRES



SIZE

0.80 mm to 5.00 mm
(0.034" to 0.1875")

FINISH

Bright Finish

PACKING

★ In Fiber/ Plastic Tubes of 2 Kg/ 4lbs, 5kg/ 10lbs, Also available in Bulk.

MIG WIRES



GRADES :

| | | | | | | | | | | | | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|
| AWS | 307 | 307Si | 308L | 308LSi | 309L | 309LSi | 309LMo | 310 | 312 | 316L | 316LSi | 317L | 318 |
| W.Nr. | 1.4370 | 1.4370 | 1.4316 | 1.4316 | 1.4332 | 1.4332 | 1.4459 | 1.4841/42 | 1.4337 | 1.4430 | 1.4430 | 1.4438 | 1.4576 |

| | | | | | | | | | | | | |
|--------------|--------|--------|--------|--------|--------|-----------|--------|-----|-------|-------|---------|--------|
| AWS | 318Si | 347 | 347Si | 410 | 420 | 430 | 430LNB | 409 | 409CB | 409Ti | 410NiMo | 2209 |
| W.Nr. | 1.4576 | 1.4451 | 1.4451 | 0.4006 | 1.4021 | 1.4011/16 | 1.4511 | — | — | — | — | 1.4462 |

SIZE RANGE

0.60 mm to 1.60 mm (0.025" to 0.062")

FINISH

Bright & Matt Finish

PACKING

- ★ 12.5 Kgs/ 25 Lbs, 15 Kgs/ 30 Lbs/ 33lbs Layer Wound Plastic/ Metallic Spool.
- ★ 5 Kgs/ 10 Lbs Layer Wound Plastic Spool.
- ★ 1 Kg/ 2lbs Layer Wound Plastic Spool
- ★ Wooden Reels of 250 Kgs/ 550 Lbs
- ★ In Drums of 100=250 Kgs (200-550 Lb)

CORE WIRES



SIZE RANGE

1.60 mm to 5.00 mm (0.062" to 0.1875")

PACKING

In Cut Length Or In Coils

SUBARC WIRES



SIZE RANGE

1.60 mm to 4.00 mm
(0.062" to 0.156")

PACKING

Layer Wound Coils (With Fiber Core)/
K415 Spools Of 25 Kgs./ 50lbs./ 60lbs.

MIG WIRE ON DRUM PACKING



GRADES :

| | | | | | | | | | | | | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|-----------|--------|--------|--------|--------|--------|
| AWS | 307 | 307Si | 308L | 308LSi | 309L | 309LSi | 309LMo | 310 | 312 | 316L | 316LSi | 317L | 318 |
| W.Nr. | 1.4370 | 1.4370 | 1.4316 | 1.4316 | 1.4332 | 1.4332 | 1.4459 | 1.4841/42 | 1.4337 | 1.4430 | 1.4430 | 1.4438 | 1.4576 |

| | | | | | | | | | | | | |
|--------------|--------|--------|--------|--------|--------|-----------|--------|-----|-------|-------|---------|--------|
| AWS | 318Si | 347 | 347Si | 410 | 420 | 430 | 430LNB | 409 | 409CB | 409Ti | 410NiMo | 2209 |
| W.Nr. | 1.4576 | 1.4451 | 1.4451 | 0.4006 | 1.4021 | 1.4011/16 | 1.4511 | — | — | — | — | 1.4462 |

SIZE RANGE

0.80 to 1.60 mm(0.034" to 0.062")

FINISH

Bright & Matt Finish

PACKING

- ★ In Drums of 100–250 Kgs (200-550 Lb)
- ★ Wooden Reels of 250 Kgs/ 550 Lbs

APPLICATIONS



Kitchenware and Basket



Flexible Connector



Wall Ties



Wire Mesh



Springs




Braiding



Filters



Staples



Spokes



Conveyor Belt



Wire Ropes



Nails



Welding Electrodes



Chain

USED IN INDUSTRIES LIKE



Aviation



Automobile Industries



Ship Buildings



Power Plant



Textile Industries



Electronic Industries

CHEMICAL COMPOSITION

| Grades Offered | | | | | | | | | | | | | Chemical Composition | | | | |
|----------------|-------------|-----------|-------|-----------|-----------|-------------|-----------|-----------|-----------|-----------|---------------|--------------|------------------------------------|-----------|---------------|---------------|------------------|
| TYPE | C | Mn | P | S | Si | Cr | Ni | Cu | Mo | N | Ti | Other | EQUIVALENT INTERNATIONAL STANDARDS | | | | |
| GRADE | Max | Max | Max | Max | Max | | | | | Max | Max | | W.Nr | JIS | BS | AFNOR | UNI |
| | % | % | % | % | % | % | % | % | % | % | % | % | | | | | |
| 201 (0.3%Ni) | 0.15 | 7.00-9.00 | 0.075 | 0.030 | 1.00 | 14.0-16.0 | 0.30-0.50 | 1.50-2.50 | 0.30 | 0.25 | — | — | — | — | — | — | — |
| 201 (0.6%Ni) | 0.15 | 7.00-9.00 | 0.100 | 0.030 | 1.00 | 14.0-16.0 | 0.50-0.70 | 1.50-2.50 | 0.30 | 0.25 | — | — | — | — | — | — | — |
| 201 (0.9%Ni) | 0.15 | 7.00-9.00 | 0.100 | 0.030 | 1.00 | 14.0-16.0 | 0.90-1.20 | 1.50-2.50 | 0.30 | 0.25 | — | — | — | — | — | — | — |
| 201 (3%Ni) | 0.15 | 7.00-9.00 | 0.100 | 0.030 | 1.00 | 14.0-17.0 | 3.00-4.00 | 1.50-2.50 | 0.30 | 0.25 | — | — | — | — | — | — | — |
| 201 | 0.15 | 5.50-7.50 | 0.060 | 0.030 | 0.75 | 14.0-18.0 | 3.50-5.50 | 0.75 | — | 0.25 | — | — | 1.4372 | — | — | — | — |
| 204 Cu | 0.08 | 6.50-8.50 | 0.060 | 0.030 | 2.00 | 14.0-17.0 | 1.50-3.00 | 2.00-3.00 | 0.30 | 0.25 | — | — | 1.4597 | — | — | — | — |
| 301 | 0.12 | 2.00 | 0.045 | 0.030 | 1.00 | 16.0-18.0 | 6.0-8.0 | — | — | 0.10 | — | — | 1.4310 | — | — | — | — |
| 302 | 0.12 | 2.00 | 0.045 | 0.030 | 1.00 | 17.0-19.0 | 8.0-10.0 | — | — | 0.10 | — | — | 1.4310 | SUS302 | 302S17 | Z 12CN 17-17 | X 12CrNi 17017 |
| 302HQ | 0.03 | 2.00 | 0.045 | 0.030 | 1.00 | 17.0-19.0 | 9.0-11.0 | 3.0-4.0 | — | — | — | — | 1.4567 | — | 394S31 | Z 2CN4 18-10 | — |
| X M7 | 0.03 | 2.00 | 0.045 | 0.030 | 1.00 | 17.0-19.0 | 8.0-10.0 | 3.0-4.0 | 0.10 | — | — | — | — | — | — | — | — |
| 303 | 0.08 | 2.00 | 0.045 | 0.15-0.35 | 1.00 | 17.0-19.0 | 8.0-10.0 | — | — | — | — | — | 1.4305 | SUS303 | 303S31 | Z 10CNF 18-09 | X 10CrNiS 1809 |
| 303Cu | 0.08 | 2.00 | 0.045 | 0.15-0.35 | 1.00 | 17.0-19.0 | 8.0-10.0 | 1.4-3.0 | — | 0.10 | — | — | 1.4570 | — | — | — | — |
| 304 | 0.08 | 2.00 | 0.045 | 0.030 | 1.00 | 18.0-20.0 | 8.0-10.0 | — | — | — | — | — | 1.4301 | SUS304 | 304S15 | Z 6CN 18-09 | X 5CrNi 1810 |
| 304HC | 0.08 | 2.00 | 0.045 | 0.030 | 1.00 | 18.0-20.0 | 8.0-10.0 | 2.0-3.0 | — | — | — | — | — | — | — | — | — |
| 304L | 0.03 | 2.00 | 0.045 | 0.030 | 1.00 | 17.0-19.0 | 10.0-12.0 | — | — | — | — | — | 1.4306 | SUS304L | 304S11 | Z 2CN 18-10 | X 2CrNi 1811 |
| 304L | 0.03 | 2.00 | 0.045 | 0.030 | 1.00 | 17.5-19.5 | 8.0-10.5 | — | — | 0.11 | — | — | 1.4307 | SUS304L | 304S11 | Z 2CN 18-10 | X 2CrNi 1811 |
| 305 | 0.06 | 2.00 | 0.045 | 0.030 | 1.00 | 17.0-19.0 | 11.0-13.0 | — | — | — | — | — | 1.4303 | — | — | — | — |
| 310S | 0.08 | 2.00 | 0.045 | 0.030 | 1.50 | 24.0-26.0 | 19.0-22.0 | — | — | — | — | — | 1.4845 | — | — | — | — |
| 314 | 0.25 | 2.00 | 0.045 | 0.030 | 1.50-3.00 | 23.0-26.0 | 19.0-22.0 | — | — | — | — | — | 1.4841 | — | — | — | — |
| 316 | 0.08 | 2.00 | 0.040 | 0.030 | 1.00 | 16.0-18.0 | 10.0-14.0 | — | 2.00-3.00 | — | — | — | 1.4401 | SUS316 | 316S31 | Z 6CND 17-11 | X 8CrNiMo 1713 |
| 316L | 0.03 | 2.00 | 0.045 | 0.030 | 1.00 | 16.0-18.0 | 10.0-14.0 | — | 2.00-3.00 | — | — | — | 1.4404 | SUS316L | 316S11 | Z 6CND 17-12 | X 2CrNiMo 1712 |
| 316Ti | 0.08 | 2.00 | 0.045 | 0.030 | 1.00 | 16.0-18.0 | 10.0-12.0 | — | 2.00-3.00 | — | 5X%C upto 0.8 | — | 1.4571 | — | 320S31-320S17 | Z 6CNDT 17-12 | X 6CrNiMoTi 1712 |
| 321 | 0.08 | 2.00 | 0.045 | 0.030 | 1.00 | 17.0-19.0 | 9.0-13.0 | — | — | — | 5X%C Minimum | — | 1.4541 | SUS321 | 321S31 | Z 6CNT 18-10 | X 6CrNiTi 1811 |
| 347 | 0.08 | 2.00 | 0.045 | 0.030 | 1.00 | 17.0-19.0 | 9.0-13.0 | — | — | — | — | Nb>=10X%C | 1.4550 | — | — | — | — |
| 2340 | 0.10 | 2.00 | 0.040 | 0.030 | 1.00 | 16.0-18.0 | 8.0-10.0 | — | 1.30-1.80 | — | — | — | — | — | — | — | — |
| 409 | 0.08 | 1.00 | 0.045 | 0.030 | 1.00 | 10.50-12.50 | — | — | — | — | 6X %C | — | 1.4512 | — | — | — | — |
| 409Cb | 0.06 | 1.00 | 0.045 | 0.040 | 1.00 | 10.50-11.75 | 0.50 max | — | — | — | — | — | — | — | — | — | — |
| 410 | 0.15 | 1.00 | 0.040 | 0.045 | 1.00 | 11.5-13.5 | — | — | — | — | — | — | 0.4006 | — | — | — | — |
| 416 | 0.15 | 1.00 | 0.040 | 0.15-0.30 | 1.00 | 12.0-14.0 | — | — | — | — | — | — | 1.4005 | — | — | — | — |
| 420 | 0.15 - 0.25 | 1.00 | 0.040 | 0.040 | 1.00 | 12.0-14.0 | — | — | — | — | — | — | 1.4021 | — | — | — | — |
| 420C | 0.43 - 0.25 | 1.00 | 0.040 | 0.040 | 1.00 | 12.0-14.0 | — | — | — | — | — | — | 1.4034 | — | — | — | — |
| ER 420 | 0.30 - 0.37 | 1.00 | 0.030 | 0.030 | 1.00 | 12.0-14.0 | — | — | — | — | — | — | 1.4028 | — | — | — | — |
| 430 | 0.10 | 1.00 | 0.040 | 0.040 | 0.75 | 16.0-18.0 | 0.60 | — | — | — | — | — | 1.4016 | SUS430 | 430S17 | Z8C17 | X 8Cr17 |
| 430L | 0.030 | 1.00 | 0.040 | 0.040 | 1.00 | 16.0-18.0 | — | — | — | — | — | — | 1.4016 | — | — | — | — |
| 430Cu | 0.12 | 0.30-0.5 | 0.040 | 0.040 | 0.30-0.50 | 16.0-18.0 | 0.50 max | 0.85-1.00 | — | — | — | — | — | — | — | — | — |
| 430F | 0.12 | 1.25 | 0.060 | 0.060 | 1.25 | 16.0-18.0 | — | — | — | — | — | — | — | — | — | — | — |
| 430F DIN | 0.12 | 1.25 | 0.060 | 0.060 | 1.25 | 16.0-18.0 | — | — | 0.20-0.60 | — | — | — | 1.4104 | — | — | — | — |
| 430Nb | 0.08 | 1.00 | 0.045 | 0.045 | 1.00 | 16.0-18.0 | — | — | — | — | — | Nb 12 X%C | 1.4511 | — | — | — | — |
| 431 | 0.12 - 0.23 | 1.50 | 0.040 | 0.040 | 1.50 | 15.0-17.0 | 1.50-2.50 | — | — | — | — | — | 1.4057 | — | — | — | — |
| 434 | 0.12 | 1.00 | 0.040 | 0.040 | 1.00 | 16.0-18.0 | 0.50 max | 0.75 max | 0.75-1.25 | — | — | — | 1.4113 | — | — | — | — |
| 441 | 0.03 | 1.00 | 0.040 | 0.040 | 1.00 | 17.5-18.5 | — | — | — | — | 0.10-0.60 | Nb 0.35-1.00 | 1.4509 | — | — | — | — |
| 2101 | 0.040 | 4.00-6.00 | 0.040 | 0.040 | 4.00-6.00 | 21.00-22.00 | 1.35-1.70 | 0.10-0.80 | 0.10-0.80 | 0.20-0.25 | — | — | 1.4162 | — | — | — | — |
| 2205 | 0.030 | 2.00 | 0.030 | 0.030 | 2.00 | 21.00-23.00 | 4.50-6.50 | 0.10-0.60 | 2.50-3.50 | 0.10-0.22 | — | — | 1.4462 | SUS32953L | 318S13 | — | — |
| 2209 | 0.030 | 0.50-2.00 | 0.030 | 0.030 | 0.50-2.00 | 21.50-23.50 | 7.50-9.50 | 0.75 | 2.50-3.50 | 0.08-0.20 | — | — | — | — | — | — | — |
| 2304 | 0.030 | 2.00 | 0.030 | 0.030 | 2.00 | 22.0-24.0 | 3.50-5.50 | 0.10-0.60 | 0.10-0.60 | 0.05-0.22 | — | — | 1.4362 | — | — | — | — |
| 2553 | 0.040 | 1.50 | 0.040 | 0.040 | 1.50 | 24.0-27.0 | 4.50-6.50 | 1.50-2.50 | 2.90-3.90 | 0.10-0.25 | — | — | — | — | — | — | — |
| 2594 | 0.030 | 2.50 | 0.030 | 0.030 | 2.50 | 24.0-27.0 | 8.0-10.50 | 1.50 | 2.50-4.50 | 0.20-0.30 | — | W -1.0 | — | — | — | — | — |



SUPERON SCHWEISSTECHNIK INDIA LTD.

Corporate Office: 552, Sector - 37, Pace City - II, Gurgaon, Haryana - 122001, India
Tel.: (124) - 4940900

E-Mail Domestic : sales@superonindia.com, E-Mail International : export@superonindia.com
Web site : www.superonindia.com