




# VAN TUIJL

INNOVATIONS

## WEEDELETE® RS


Mechanical weed control.  
The intra-row weeder hoes both between and in the rows of the trees. It also takes obstacles and drip hoses into account.

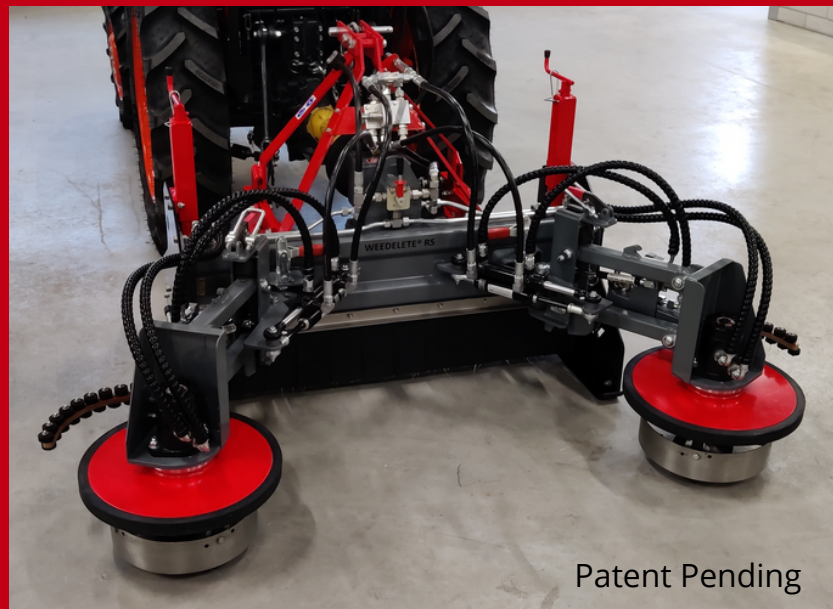

Patent Pending

WEEDELETE® RS	Minimum working width	Maximum working width including 2 swing rotors of choice			Minimum machine width	Machine weight
		20 cm	25 cm	30 cm		
RS 80-Z2	80 cm	120 cm	130 cm	140 cm	91 cm	± 305 Kg
RS 100-Z2	104 cm	144 cm	154 cm	164 cm	114 cm	± 335 Kg
RS 130-Z2	127 cm	167 cm	177 cm	187 cm	137 cm	± 370 Kg
RS 150-Z2	150 cm	190 cm	200 cm	210 cm	160 cm	± 395 Kg



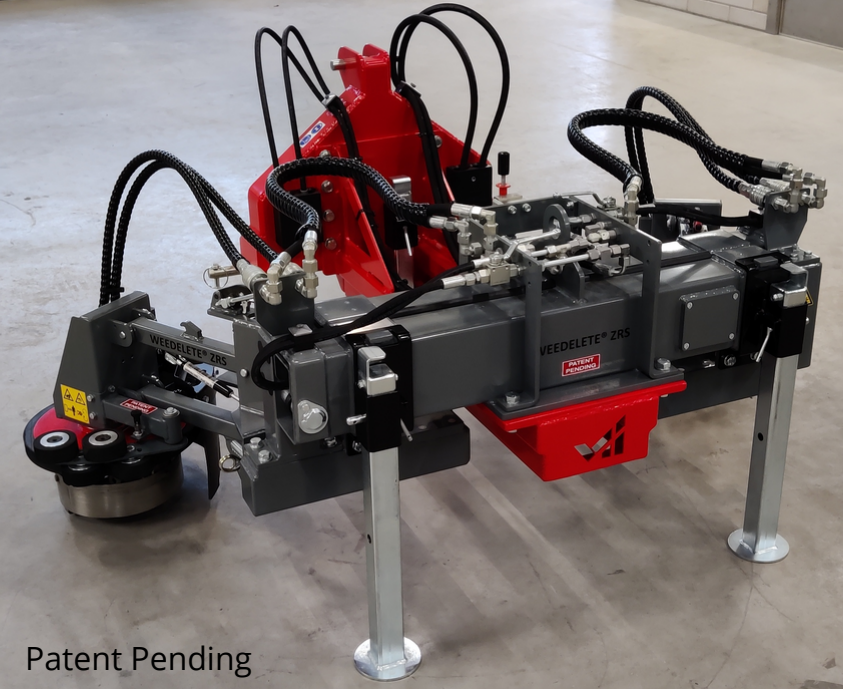

Patent Pending



## WEDELETE® ZRS

Mechanical weed control. This intra-row weeder is meant to hoe blackstrips in tree nurseries, sparing the grass strips in the paths. The WEDELETE® ZRS can be optionally coupled to the front or the rear of the tractor.

WEDELETE® ZRS	Minimum working width	Maximum working width	Maximum machine width	Machine weight
Hydraulic width adjustment	160 cm	320 cm	125 cm	± 350 Kg
Manual width adjustment	160 cm	320 cm	125 cm	± 340 Kg

The swing rotors can be supplied with different sizes of rotor hoes, Ø 20 cm, Ø 25 cm en Ø 30 cm.

### Important information of WEDELETE® RS en ZRS:

- Required power: minimum 30 HP.
- Minimum hydraulic output 25 liters.
- Easily adjustable depth control.
- Easily adjustable working width.
- Easily adjustable ground pressure of the swing rotor, dependent on soil type, sandy, peat and clay soils.
- Leveling effect of the soil.
- Environmentally friendly.
- Version swing rotor with roller probe (mechanical), trunk diameter ≥ 25 mm.
- Version swing rotor with roller probe (hydraulic).
- The working speed of the WEDELETE® RS depends on the planting distance in the row.
- The maximum working speed is ± 5 km per hour.

\* sizes and weights are approximate and subject to change

Van Tuijl Innovations B.V.  
Tolsestraat 8A  
4043 KB Opheusden (NL)

info@vti.nl  
www.vti.nl  
KVK 74616161

+ 31 (0) 6 53 95 44 44  
+ 31 (0) 6 20 60 85 79